
1.0/2.0/3.0ml | 300mAh

Postless 100% Metal Free

TANK VOLUME 1.0/2.0/3.0ml	RESISTANCE 1.4Ω
OUTPUT POWER 2.4V-2.8V-3.2V	BATTERY CAPACITY 280mAh
ACTIVATION Button Activated	TANK MATERIAL PCTG
COIL Cottonless Bucket Ceramic	



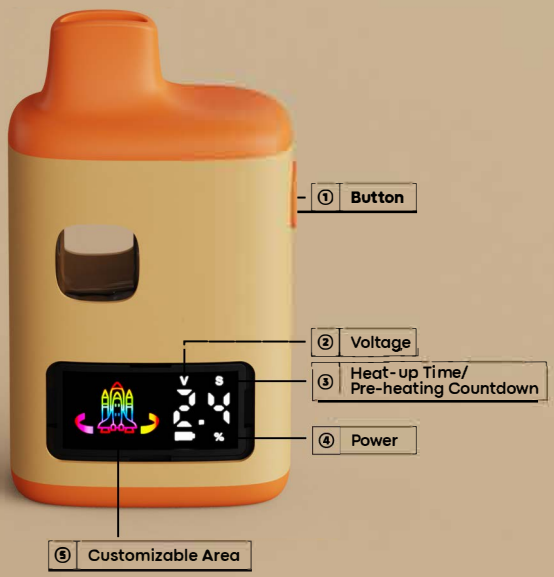

TURN ON/OFF

Press the button **5** times quickly in 2 seconds

ADJUSTVOLTAGES

Press the button **3** times quickly in **2** seconds



PRE-HEATING

Press the button twice to activate pre-heating. The device will pre-heatat 1.8v,and the screen will display a countdown from **10s to 1s**.

